
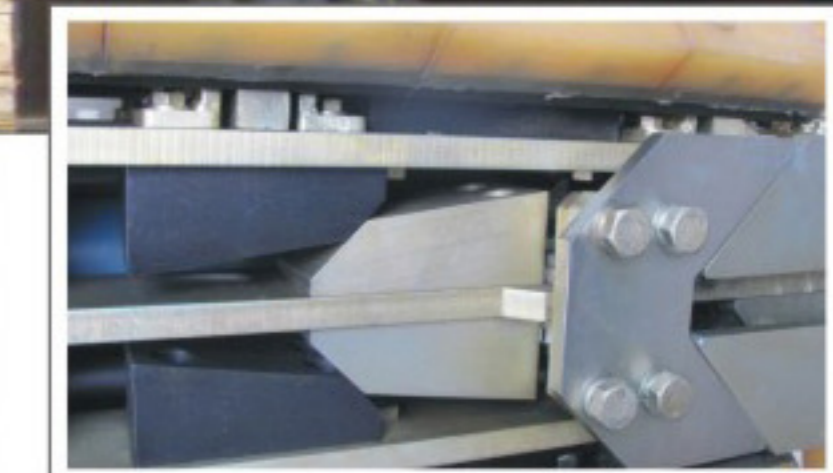
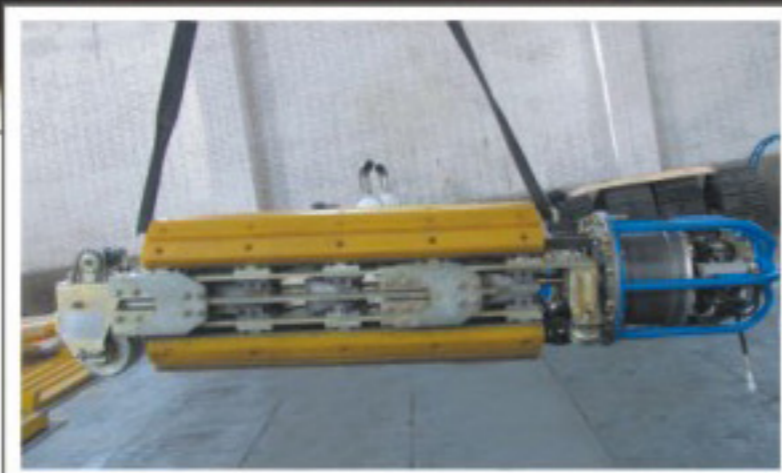
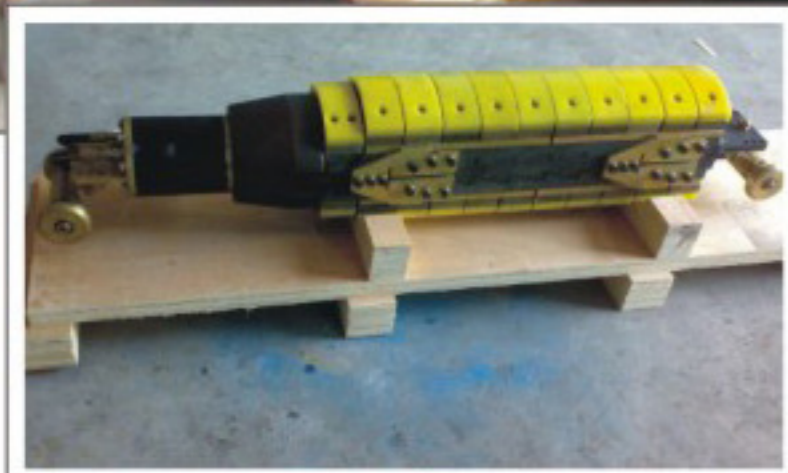


液压弯管机芯轴 Hydraulic pipe bending mandrel

世界一流产品,用心打造每一个细节
THE FIRST-CLASS PRODUCTS IN THE WORLD,
BUILD EVERY DETAIL WITH HEART

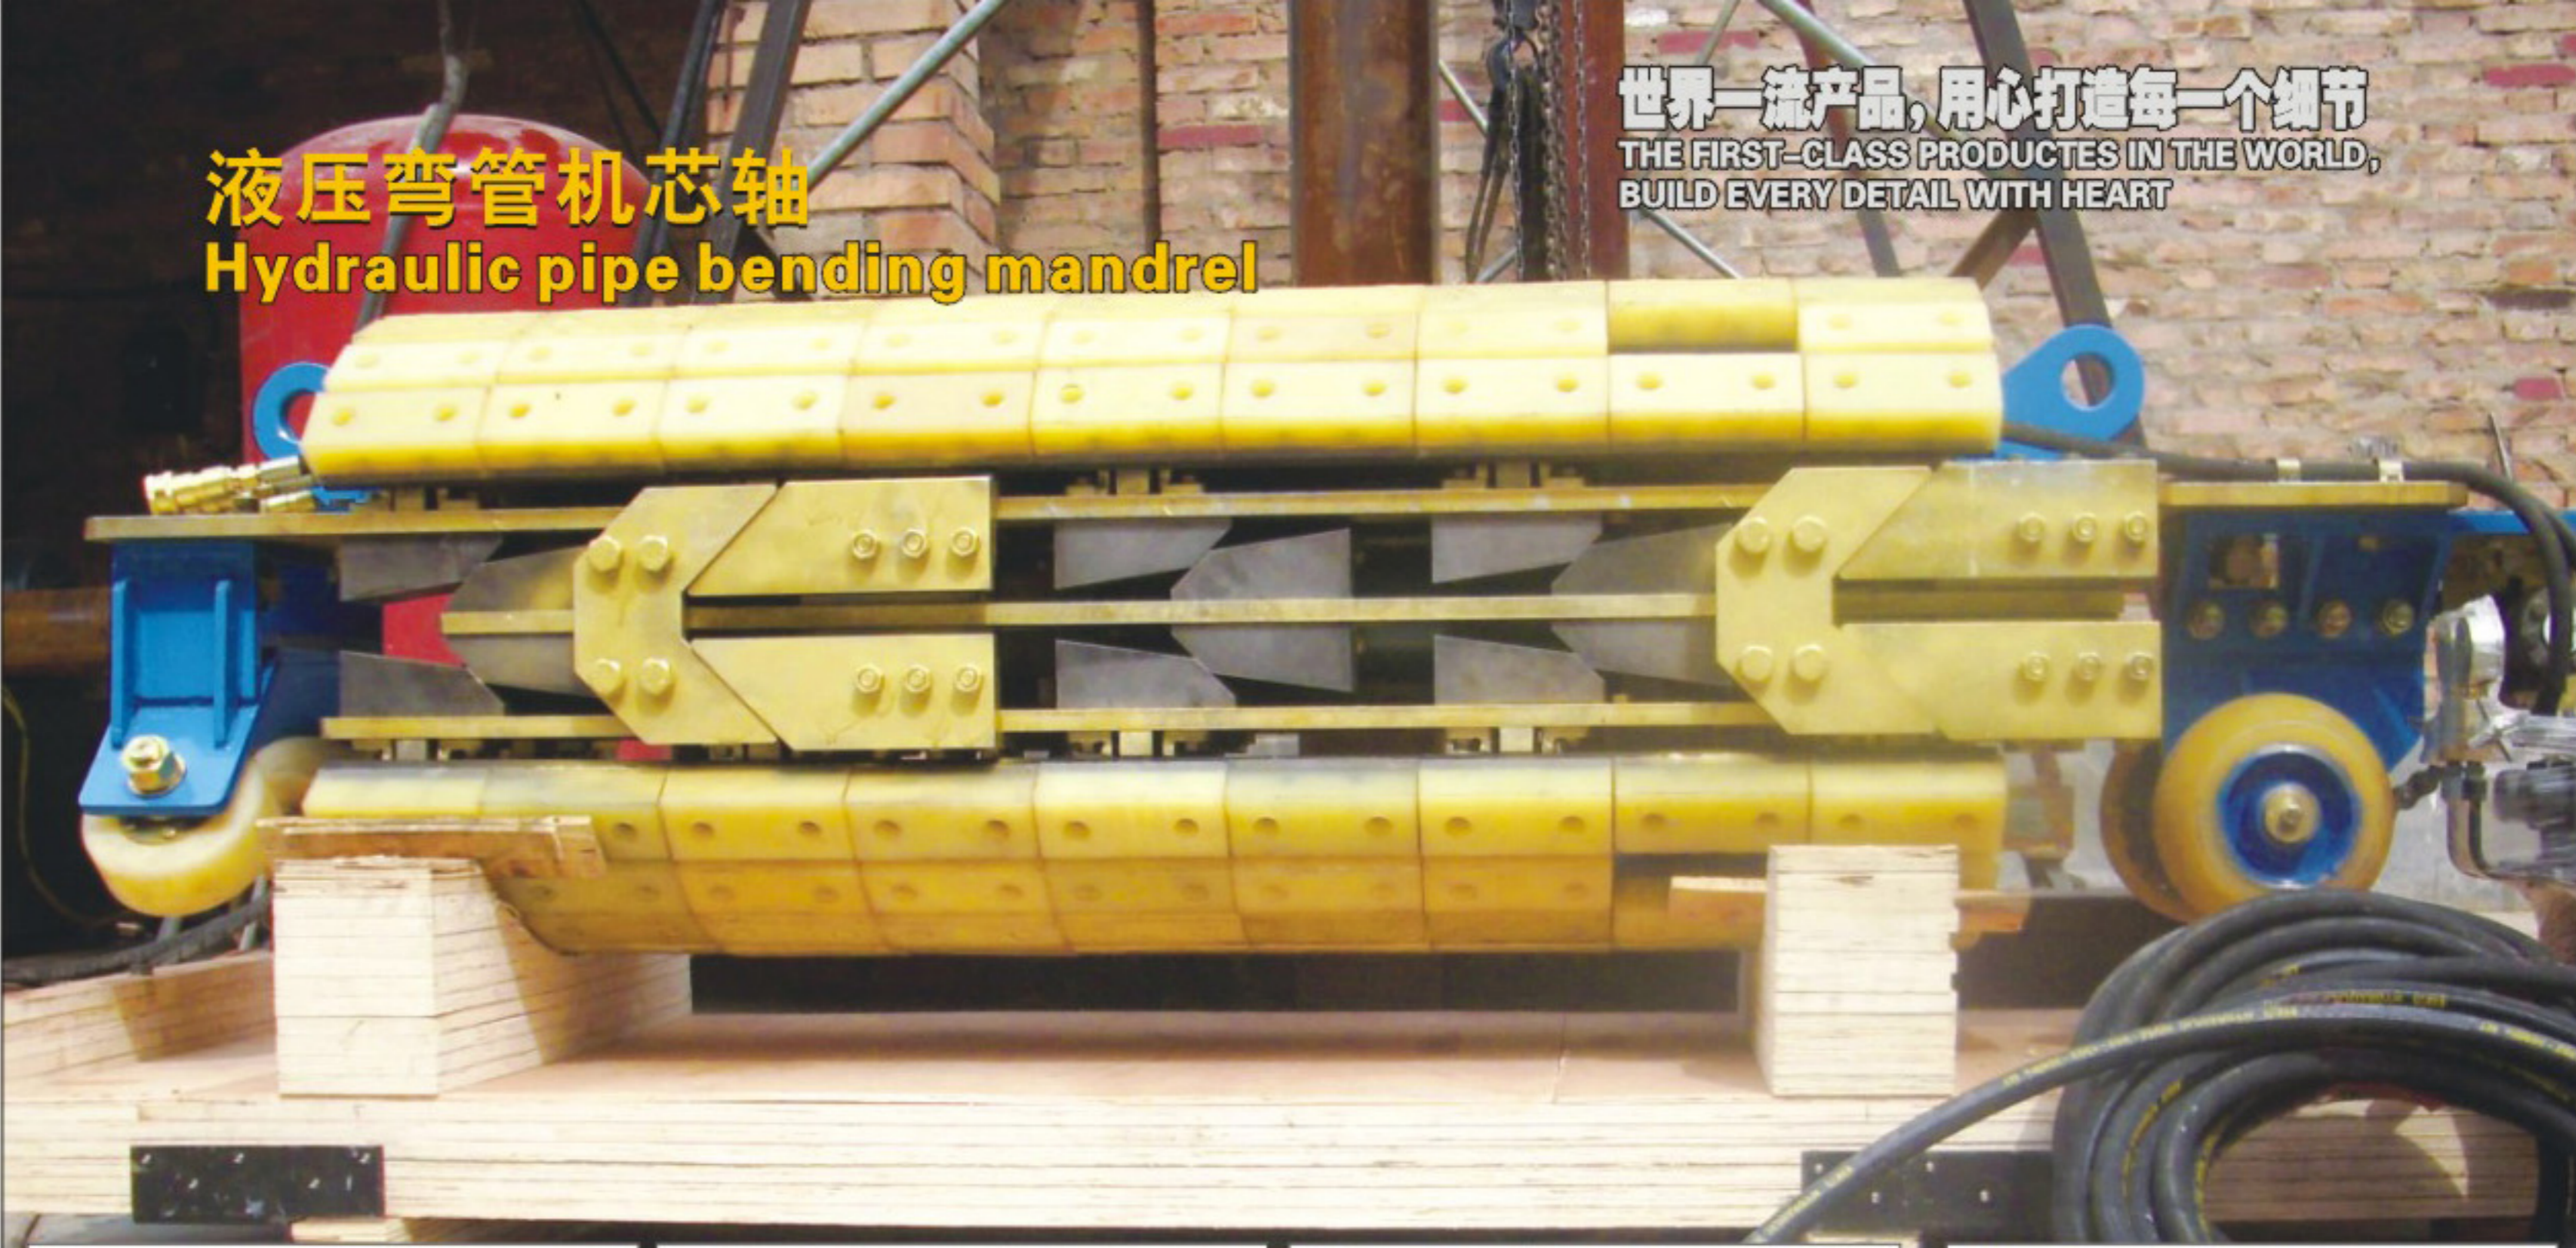

芯轴：冷弯管机的关键部件之一，它主要用于冷弯管制作过程中防止弯管内壁起褶皱，控制弯管的椭圆度。

Mandrel: one of key parts of pipe bending machine, it is for purposes of preventing pipe inner wall from wrinkling and controlling ovality during cold bending process of pipe bending machine

- 斜块导力结构：涨紧力分配合理，强劲，自锁功能优良；
- 涨紧缸内置：结构紧凑合理，液压动力涨紧力大；
- 液压马达行走装置：可实现自动行走，可控工作位；
- 鳞片式聚氨酯涨紧块：设计合理，拆装方便，耐磨性高。

- Wedge-form force transmission mechanism: powerful and reasonable distributed clamping force, intense self-locking function
- Clamping cylinder inside placed: compact and reasonable structure, powerful clamping force.
- Hydraulic motor travelling setting: this setting is for walking function realization, working position can be controlled precisely by the control system
- Scale polyurethane clamping shoes: reasonable design, easy for assembling and disassembling, high abrasive resistance

型号 Model	PBM10	PBM12	PBM14	PBM1618	PBM2022	PBM2426	PBM2830	PBM3234
重量 Weight(kg)	200Kg	250Kg	320Kg	380Kg	550Kg	620Kg	750Kg	980Kg
适用范围 Application(in)	10"	12"	14"	16" -18"	20" -22"	24" -26"	28" -30"	32" -34"
型号 Model	PBM3638	PBM4042	PBM4446	PBM4850	PBM5254	PBM5658	PBM6062	PBM6466
重量 Weight(kg)	1150Kg	1350Kg	1650Kg	1850Kg	2300Kg	2650Kg	3000Kg	3300Kg
适用范围 Application(in)	36" -38"	40" -42"	44" -46"	48" -50"	52" -54"	56" -58"	60" -62"	64" -66"



洛阳德平机械设备有限公司

Luoyang Deping Mechanical Equipments Co.,Ltd.

电话(Tel):+86-379- 64280768 +86-15038590497

网址(Web):http://www.lydpjx.com www.dppipemachine.com

邮箱(Email): lydpjx@163.com